

... From development to  
implementation



## Production of materials testing equipment and automation

Electromechanical testing machines  
series **LabTest E.3** up to **250 kN**



Made in Czech Republic



Production of materials testing equipment and automation

Electromechanical testing machines  
LabTest 6.200 - 6.250

... From development to implementation

## Basic description

Electromechanical testing machines of series E.3 in double-column stand design up to 250 kN are universal static testing systems suitable for both research and development as well as common quality control in laboratories and factories. Combined with an extensive range of accessories, it is safe and efficient to test the materials and entire products on the machine in tension, pressure, bending, shear and torsion, be it for plastics, metals, composites, paper, polyurethanes, etc.




## Main advantages and functions

- Ball screws with preload, massive crossbar, accurate drive and especially the side linear guide contribute to better utilization of power, almost no deformation of the frame, ideal energy absorption and implementation of optional off-axial loading of the specimen.
- The key strength of the E.3 series is the robustness, rigidity, durability and mechanical resistance of the test frame to vibration and mechanical damage. These properties make it possible to test high strength materials such as aerospace composites, metal alloys, advanced composites, automotive structures and crystalline polymers.
- Easy access to the test area is very important for the operator. Our machines are at a very high ergonomic level with easy handling of metal specimens, fasteners or composite materials.
- High machine operator comfort. The device can be tailored to the customer's specific requirements, for example by extending the test frame, creating the upper and lower working space, multiple workspaces side by side, using one load cell for 2 workspaces, higher speeds etc.

- The low-noise, high-resolution AC servo drive, quiet and precise, provides precise machine control in power and positioning loops. These drives excel at high return speeds that are significantly above the nominal testing speeds.
- Option of the electromechanical machine control including control of clamping grips and extensometers via the remote control RMCi 7.
- By using peripheral ITEM profiles, we fulfil the idea of a modular machine arrangement with the possibility of adding any LABORTECH accessories, including extensometers, temperature chambers, probes, fixtures, protective safety covers, hydraulic power units etc.

## Measuring and control machine electronics

New fast, accurate and reliable EDCi measuring and control electronics with variable sampling system up to 10kHz, 64 bit internal accuracy, 32 bit measurement and 24 bit resolution ADCs. Modular system with the possibility of extending the measurement up to 16 sensors. SAFETY with new safety features according to ENB ISO 13850-SIL 1 / PL.



## Force measuring system

- The E-series load cells are ideal for tensile, compression, bending and cyclic tests. They are characterized by high resistance to lateral forces, bending moments and high overload resistance. Accuracy class according to EN ISO 7500-1, ASTM E4 is commonplace. Each sensor is equipped with an SGS connector with an integrated EEPROM to which the calibration constant and linearization can be configured.
- The accuracy class of the load cells supplied by us is 0,5 or 1.
- The load cell type is always chosen according to the type of the testing and test fixtures used.

... From development to implementation

## Basic features of Test & Motion® software

- Intelligent software designed for tensile and compression testing
- Unlimited number of test methods depending on EN, ISO, ASTM, GOST standard or customer method
- A modular system of libraries designed for standardized tests – selection for activation
- Evaluation of optional parameters: maximum force, strength, elongation, elongation, tension of 5 different reference points.
- Real-time graph, individual processing after test
- Bulk Charts, zoom, serial testing



- Statistical evaluation
- Graphical editor of protocol design
- Any setting of windows and appearance of the environment, anchoring
- Data export to ASCII, EXCEL, WORD, Eclipse, Diadem, Q-DAS, 9 language mutations (Cz, En, Ge, Fr, Pol, It, Sp, Ru, Du)
- Unlimited license
- Installation on any computer without a license, FREE DEMO
- Compatibility with every EDC or EDCi system from LABORTECH

## Safety and service life requirements


- LABORTECH machines, based on their design and construction, comply with all of the above EC Machinery and Equipment Directives.
- The customer always receives an EC declaration of conformity.
- Only state-of-the-art safety technology and proven industrial components operating in accordance with the new ENB ISO 13850-SIL 1 / PL safety features are used.
- Spare parts are available 10 years after the end of the machine type production.

# Labor Tech

Production of materials testing equipment and automation

Electromechanical testing machines  
LabTest 6.200 - 6.250

... From development to implementation

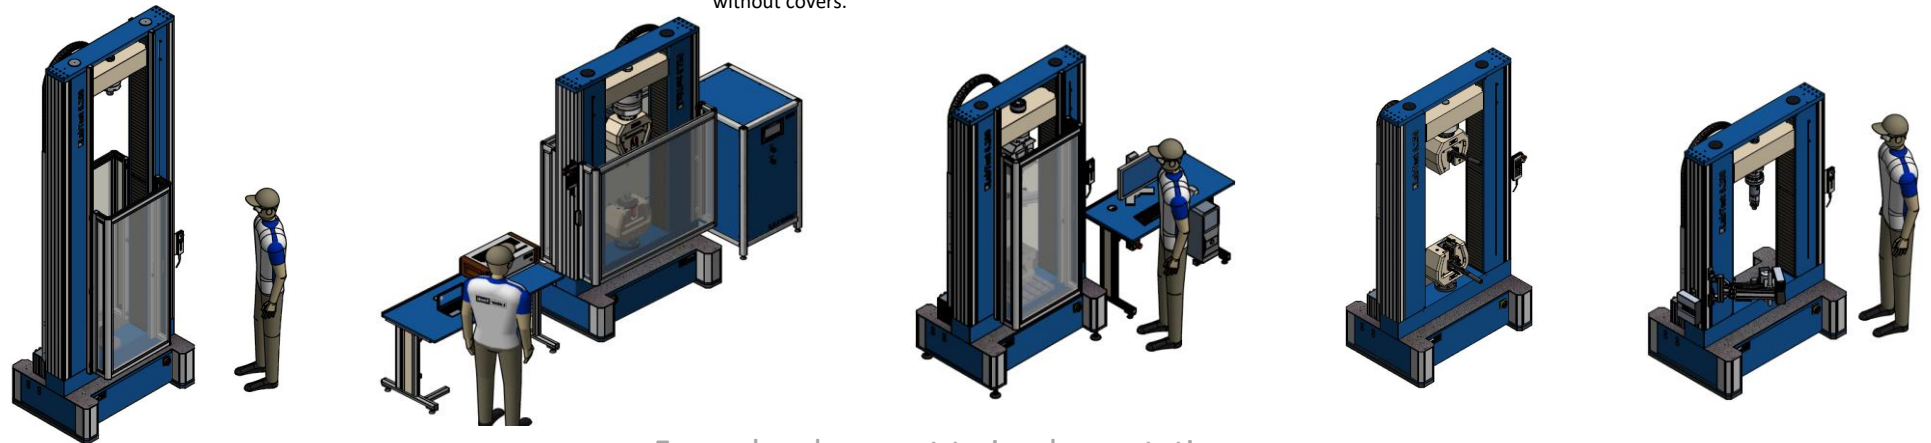

... From development to implementation

Technical data	Units	6.200.1.10	6.200.1.20	6.200.1.30	6.200.1.40	6.250.1.10	6.250.1.20	6.250.1.30	6.250.1.40
Nominal load tension/pressure	kN	200				250			
Number of columns						2			
Number of ball screws						2			
Number of linear guides						2+2			
Minimal testing speed	mm/min	0,00005				0,00005			
Maximal testing speed	mm/min	1000				700			
Machine drive resolution	µm	0,0122				0,0105			
Repeatability of the crossbar position	µm	±2				±2			
Weight <sup>1</sup>	kg	1190	1220	1255	1550	1215	1245	1280	1575
<b>Dimensions</b>									
Machine height (A)	mm	1960	2360	3370	5010	1960	2360	3370	5010
Machine width (B)	mm	1220				1220			
Machine depth (C)	mm	840				840			
Width of workspace (D)	mm	630 (720) <sup>3</sup>							
Height of workspace (E)	mm	1150	1550	2560	4200	1150	1550	2560	4200
<b>Environmental conditions</b>									
Work environment temperature	°C					od 10 do 35			
Storage temperature	°C					od -35 do 55			
Humidity range	%					< 90			
Noise level <sup>2</sup>	dB					< 63			
<b>Electrical connection</b>									
Supply voltage	V					3x230V/400V 50/60Hz			
Fuse	A					16			
Power rating (without accessories)	kVA					3			

<sup>1</sup> The machine weight is without of testi inserts and Load cell. <sup>2</sup> Machine noise is measured 1 m from the test machine. <sup>3</sup>Width of test space without covers.

## LABORTECH in the world



### Contact:

#### **LABORTECH s.r.o.**

Rolnická 130a, 747 05 Opava, Czech Republic

Phone: +420 553 731 956, +420 553 668 648

E-mail: [info@labortech.cz](mailto:info@labortech.cz)

Web: [www.labortech.cz](http://www.labortech.cz)

GPS: 49°57'05.1"N

17°54'04.4"E

#### **LABORTECH TRADING s.r.o.**

Areál VVÚD Praha, Na Florenci 1686/9, 111 71 PRAHA 1, Czech Republic

Phone: +420 731 656 723, +420 724 020 052

E-mail: [trading@labortech.cz](mailto:trading@labortech.cz)

Web: [www.labortech.eu](http://www.labortech.eu)

**Labor Tech**®

Production of materials testing  
equipment and automation

LABORTECH in the  
world

... from development to  
implementation